


"HETEROTOPIAS. BOTEVGRAD - LESKOVAC" UNDER INTERREG-IPA CROSS-BORDER COOPERATION PROGRAM BULGARIA-SERBIA

PROMOTIONAL CENTER

Technical specification

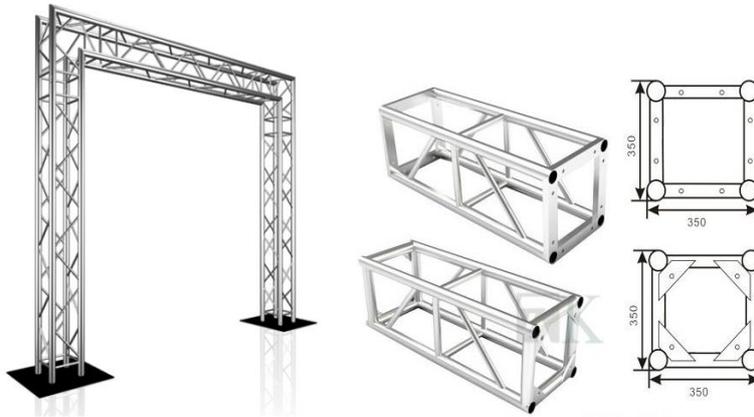

PERGOLA




L 1500s m, B 35 cm, H 4 35 cm,

RK aluminum truss 6082-T6 ,
Certified finished product - with certificate
and CE, TUV, ISO9001

Assembly of ready-made elements
of bolted connection
base of the element square 35/35 cm

50 mm outer diameter main pipe
30 mm diagonal fixation
3 mm wall thickness

Mandatory! Measure out of place

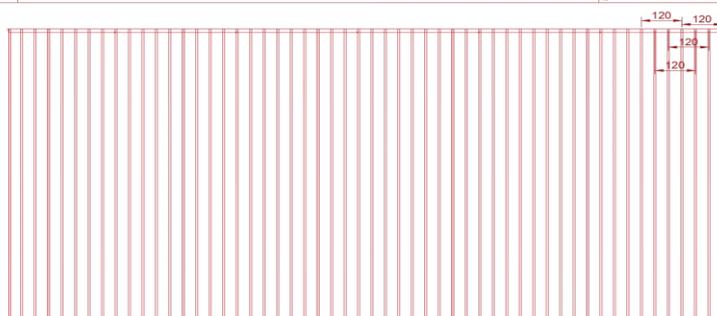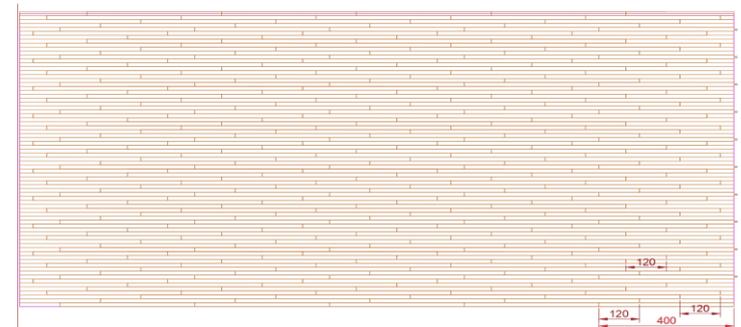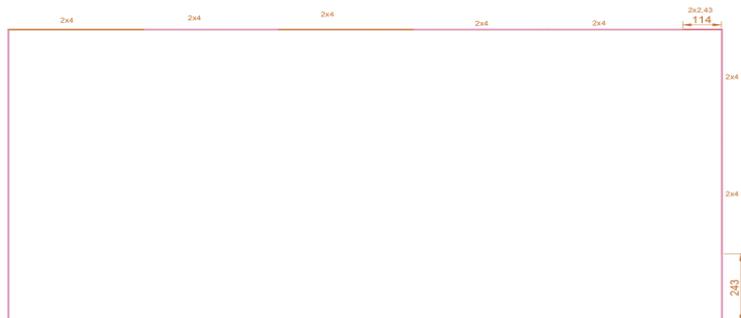

DECKING

Courtyard area 227.50 square meters

L 64 m edging = 16br.H 4 m
L 676 m grill = 169pcs. x 4m
L 1632 m decking = 408 pcs. X 4 m


mounting elements for installation of
wood on steel and wood on wood -
stainless steel, powder coated, fitting with
hidden heads of screws - of mounting
system decking

timber first category
according to Bulgarian Standards S427,
FSC / PEFC certified,
maximum humidity 12%


solid corrugated wood - Siberian larch,
specific weight 850-870 kg / m3, including
double underlayment

prefabricated wooden grille of
impregnated smooth profile 60 / 60mm
and fasteners / 1 sq.m. decking is installed
with 3.5 l.m grill of underlay profile and 22
screws /,

protective double-sided impregnation
for exterior installation of the decking
for preventive long-term protection from
weathering, insects , fire
and polyurethane coating
for the base grill

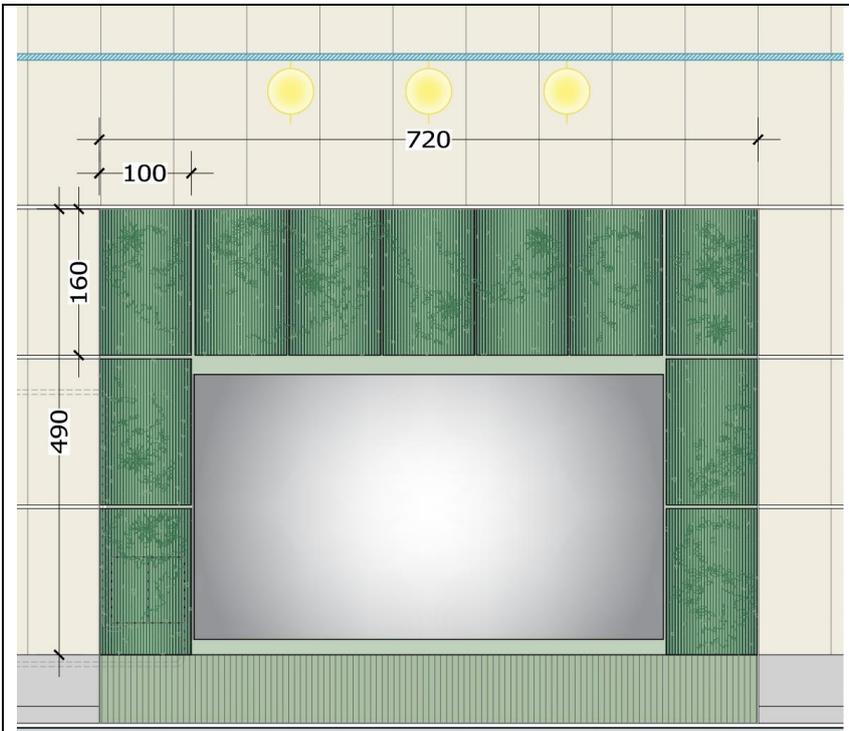

Landscaping system on an installation wall

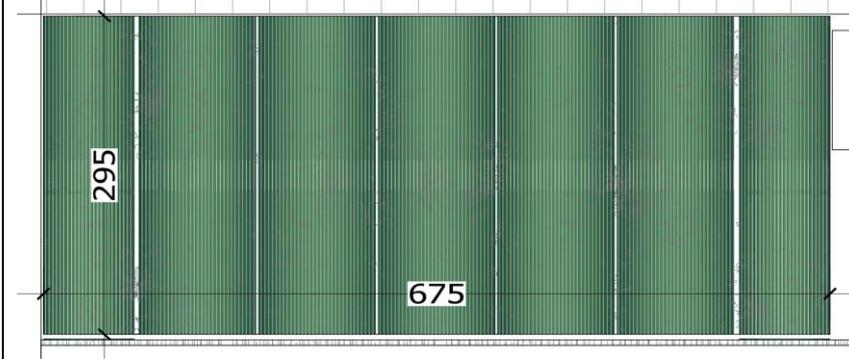

Landscaping system on a solid wall

SYSTEM VERTICAL LANDSCAPING

Vertical landscaping system
The weight of the system is **70-80 kg / sq.m**

Area of the system **S 47sq.m** ,
of which system installation
on an existing wall -

S 27sq.m on an installation wall
S 20sq.m area on a solid wall

Plastic modules, dense installation
metal profile for installation,
drip irrigation hose for 47sq.m

Automated irrigation system -
programmer, valve, filter, etc.

with water supply provided

existing water supply network :

- supply with water -

From an existing outlet of a building water
supply system in the courtyard


- oh tvodnyavane system -

in building sewerage in ext . yard

Plants 80 pcs / sq.m Lonicera nitida ,
Heuchera (two or three flowers) and
succulent vegetation.

The plants should be grown in the
modules of the system from cuttings or
seedlings, minimal care of the plants in
the modules before installation 2-3 weeks.

Technological peat substrate 4cub. m



CONCRETE BICYCLE STAND

L 100 cm, B 55 cm, H 26 cm,
high-strength reinforced fiber concrete
and natural mosaic

Surface treatment -

customs mosaic, white, UV and
waterproofing varnish

built-in metal rings made of stainless steel

ARCH.MARIELA ANDREEVSKA